

Company Name: _____ PO No. _____ Job Name: _____ Date: _____
 Address: _____ City: _____ State: _____ Zip: _____
 Phone: _____ Email: _____
 Ship to Name: _____ Jobsite POC: _____
 Address: _____ Jobsite Phone: _____
 City: _____ State: _____ Zip: _____

Opening Number	STC Rating	Non STC	Opening Width	Opening Height	Rough Opening	2-pc Welded Split Frames	Slip-In Continuous	3-pc Knock Down Non-STC	Swing Handing	Wall Throat	Overall Jamb Depth	Door Material	Fire Label	Closer Opening Degree	Auto Operator LKM7550	Locking Device (See Below for Hardware) Mark below or best alternate	Notes

LKM10K Lock Series meets FF-L-2890B & FF-L-2740B, LKM10K Lock Series (all with US26D Finish)



- LKM10K-H-X10 (Lever/Push/Pull Handle with Key Override Housing: (Key Override not required. If Key Override is required, select Medeco, Best/Falcon, Schlage, Sargent, Corbin Yale)
- LMK10K-P-X10 (Lever/Panic Bar with Key Override Housing: (Key Override not required. If Key Override is required, select Medeco, Best/Falcon, Schlage, Sargent, Corbin Yale)
- LKM10K-HE (Push/Pull Handle Exit Only with Deadbolt status switch)
- LKM10K-PE (Panic Bar Exit Only with Deadbolt status switch)
- Kaba Mas CDX10 with Lever Lock
- SG2890 Type I, II, III, IV, V, VI
- Grade 1 Cylindrical (Specify manufacturer & model number) Grade 1 Mortise (Specify manufacturer & model number)
- Electric Strike (Specify manufacturer & model number) Grade 1 Exit Device (Specify manufacturer & model number)

Note: We also offer HMD, WOOD, BULLET RESISTANT, RF SHIELD, and VAULT DOORS

1. Please review hardware list must have manufacturer and model number
 2. All frames have 1/2" returns
 3. If 4" header is needed please allow extra lead time
 4. Jamb depth = throat + 1"
 5. Cylindrical locks require a 3-3/4" backset in order to avoid interference with sound seal assembly
 6. Standard pair with astragal surface bolts at inactive leaves are recommended
 7. Standard pair with mullion both leaves active or Standard pair with astragal flush bolts at inactive leaves extra lead time
 8. STC door size 3070 (3'x 7'), rough opening required for 2-pc split frame (39"x 85-1/2")
 9. STC door size 3070 (3'x 7'), rough opening required for 1-pc slip in frame (40 1/2"x 86-1/2")
- Recommended all rough openings with steel studs should be wood blocked for extra support

Fill in door vision dimensions 100 sq. max
 (If vision lite required, please advise glass thickness, glass and glazing is by others)

A = _____
 B = _____
 X = _____
 Y = _____

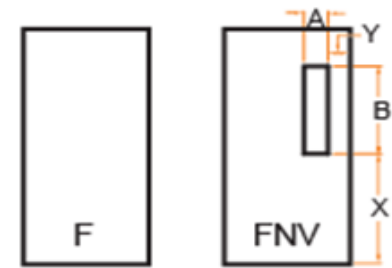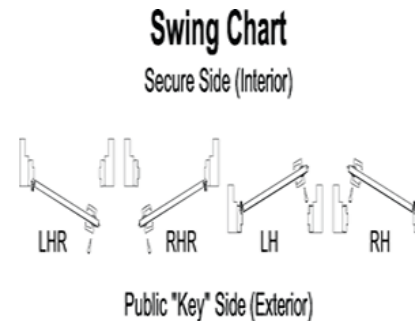

Submit Form